


Drive	S3	L3	XL3	XXL3	XXL2
Diesel generator (kVA):	60	80	80	80 / 100	80
<b>Material feeding</b>					
Hopper volume:	3.2 yd <sup>3</sup> / 4.5 yd <sup>3</sup> (option) 2.5 / 3.5 m <sup>3</sup> (option)	~ 9.2 yd <sup>3</sup> ~ 7 m <sup>3</sup>	~ 9.2 yd <sup>3</sup> ~ 7 m <sup>3</sup>	~ 15.7 yd <sup>3</sup> ~ 12 m <sup>3</sup> (option up to 19.6 yd <sup>3</sup> / 15 m <sup>3</sup> )	~ 13 yd <sup>3</sup> ~ 10 m <sup>3</sup>
Filling length:	10' 2" 3100 mm	11' 2" 3750 mm	11' 2" 3400 mm	13' 1" and 19' 4000 and 5800 mm (fillable on both sides)	13' 1" 4000 mm
Filling height:	8' 2" / 9' 10" 2500 / 3000 mm	11' 6" 3450 mm	11' 6" / 13' 1" 3500 / 4000 mm	12' 2" 3700 mm	10' 6" 3200 mm
<b>Screen segments</b>					
Coarse screen L x W / area:	7' 10" x 2' 11" / 22.6 ft <sup>2</sup> 2400 x 900 mm / 2.1 m <sup>2</sup>	10' 6" x 3' 11" / 41.4 ft <sup>2</sup> 3198 x 1200 mm / 3.85 m <sup>2</sup>	16' 5" x 3' 11" / 64.5 ft <sup>2</sup> 5000 x 1200 mm / 6.0 m <sup>2</sup>	16' 7" x 3' 11" / 65.6 ft <sup>2</sup> 5064 x 1200 mm / 6.1 m <sup>2</sup>	-
Fine screen L x W / area:	13' 11" x 2' 11" / 41.9 ft <sup>2</sup> 4250 x 900 mm / 3.9 m <sup>2</sup>	19' 2" x 4' 1" / 78.5 ft <sup>2</sup> 5852 x 1250 mm / 7.3 m <sup>2</sup>	17' 11" x 4' 1" / 73.1 ft <sup>2</sup> 5450 x 1250 mm / 6.8 m <sup>2</sup>	29' 3" x 4' 1" / 118.4 ft <sup>2</sup> 8911 x 1250 mm / 11 m <sup>2</sup>	23' x 5' 3" / 120.5 ft <sup>2</sup> 7000 x 1600 mm / 11.2 m <sup>2</sup>
<b>Screen section</b>					
Coarse particle:	> 2 2/3"...3 1/2" > 60.....90 mm	> 2 2/3"...3 1/2" > 60.....90 mm	> 1"...2" > 25...50 mm	> 2 2/3"...3 1/2" > 60.....90 mm	> 19/32"...1" > 15...30 mm
Medium particle:	3/8"...1" / 2 2/3"...3 1/2" 10.....25 / 60.....90 mm	3/8"...1" / 2 2/3"...3 1/2" 10.....25 / 60.....90 mm	3/8"...1" / 1"...2" 10...25 / 25...50 mm	3/8"...1" / 2 2/3"...3 1/2" 10...25 / 60...90 mm	-
Fine particle:	0 / 3/8"...1" 0 / 10.....25 mm	0 / 3/8"...1" 0 / 10.....25 mm	0 / 3/8"...1" 0 / 10...25 mm	0 / 3/8"...1" 0 / 10...25 mm	0 / 19/32"...1" 0 / 15...30 mm
<b>Material discharge</b>					
Max. discharge height coarse fraction:	7' 7" 2300 mm	9' 4" 2850 mm	10' 7" 3230 mm	11' 10" 3600 mm (option 15' 1" / 4600 mm)	11' 10" 3600 mm
Max. discharge height medium fraction:	9' 6" 2900 mm	11' 6" 3500 mm	11' 6" 3500 mm	11' 6" 3500 mm	-
Max. discharge height fine fraction:	7' 7" 2300 mm	10' 2" 3500 mm	10' 2" 3100 mm	10' 2" 3100 mm	8' 10" 2700 mm (option 13' 1" / 4000 mm)
<b>Dimensions</b>					
Transport dimension L x W x H:	26' 11" x 8' 1" x 8' 5" 8200 x 2450 x 2560 mm	37' 9" x 8' 5" x 13' 1" 11500 x 2550 x 4000 mm	39' 1" x 8' 2" x 13' 1" 11900 x 2500 x 4000 mm	44' 11" x 8' 2" x 13' 1" 13700 x 2500 x 4000 mm	44' 11" x 8' 5" x 12' 10" 13700 x 2550 x 3900 mm
Transport dimension semi-trailer L x W x H:		44' 7" x 8' 5" x 13' 1" 13600 x 2550 x 4000 mm			
Working dimension L x W x H:	36' 4" x 18' 2" x 9' 10" 11066 x 5542 x 3000 mm	49' 3" x 20' 10" x 13' 1" 15000 x 6350 x 4000 mm	55' 9" x 21' 4" x 13' 1" 17000 x 6500 x 4000 mm	55' 9" x 21' 4" x 13' 1" 17000 x 6500 x 4000 mm	50' 10" x 13' 11" x 12' 10" 15500 x 4250 x 3900 mm
Weight:	~ 11 t.sh ~ 10.0 t	~ 23 t.sh ~ 21.0 t	~ 24 t.sh 22.0 t	~ 29 t.sh 26.0 t	~ 24 t.sh 22.0 t
<b>Throughput (dependent on material)</b>					
Throughput performance:	up to 130 yd <sup>3</sup> /h up to 100 m <sup>3</sup> /h	up to 330 yd <sup>3</sup> /h up to 250 m <sup>3</sup> /h	up to 400 yd <sup>3</sup> /h up to 300 m <sup>3</sup> /h	up to 530 yd <sup>3</sup> /h up to 400 m <sup>3</sup> /h	up to 660 yd <sup>3</sup> /h up to 500 m <sup>3</sup> /h
<b>Options</b>					
Different screen options for coarse and fine screen, magnetic drum, discharge belt for rolling pieces, windsifter, diesel generator towing and chassis options, radio remote control, central lubrication and more					



10855 DOVER STREET, STE. 1000  
WESTMINSTER, COLORADO 80021

[t] +1 (720) 890-9090  
[f] +1 (720) 890-5907  
[e] info@komptechamericas.com  
[w] www.komptechamericas.com

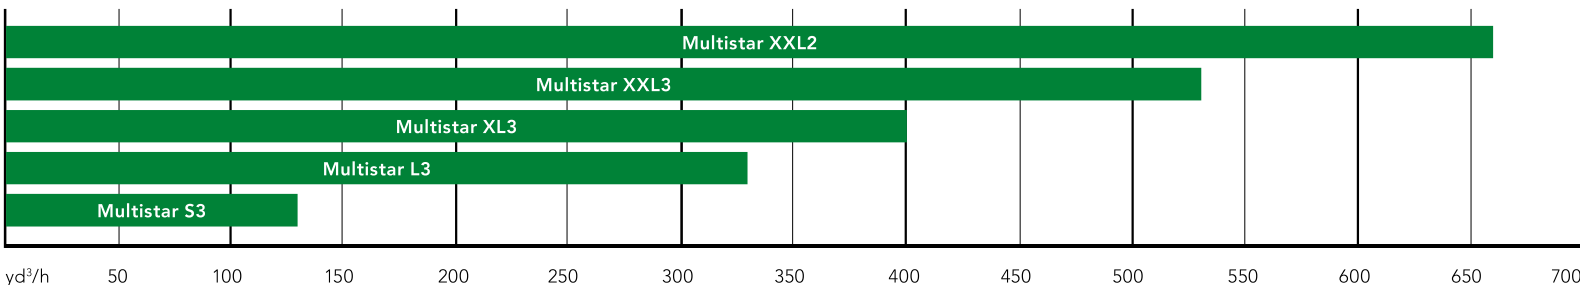

We reserve the right to make technical changes due to ongoing development. USA2016