


TOPTURN X63

Compost Windrow Turner



The Topturn X63 is designed to handle the most demanding commercial composting requirements. Available in a wheel or track chassis and driven by a powerful CAT® C13 diesel engine, the X63 produces a maximum windrow width of up to 18'8" with a turning capacity of up to 5,800 yd³/hr. The hydraulically extended maintenance platform enables quick maintenance access.

- ▶ Produces ideal triangular windrow shape for faster composting times
- ▶ Easy and accessible maintenance with hydraulically extendable service platforms
- ▶ Infuse water directly into the center of the windrow pile while turning (available option)

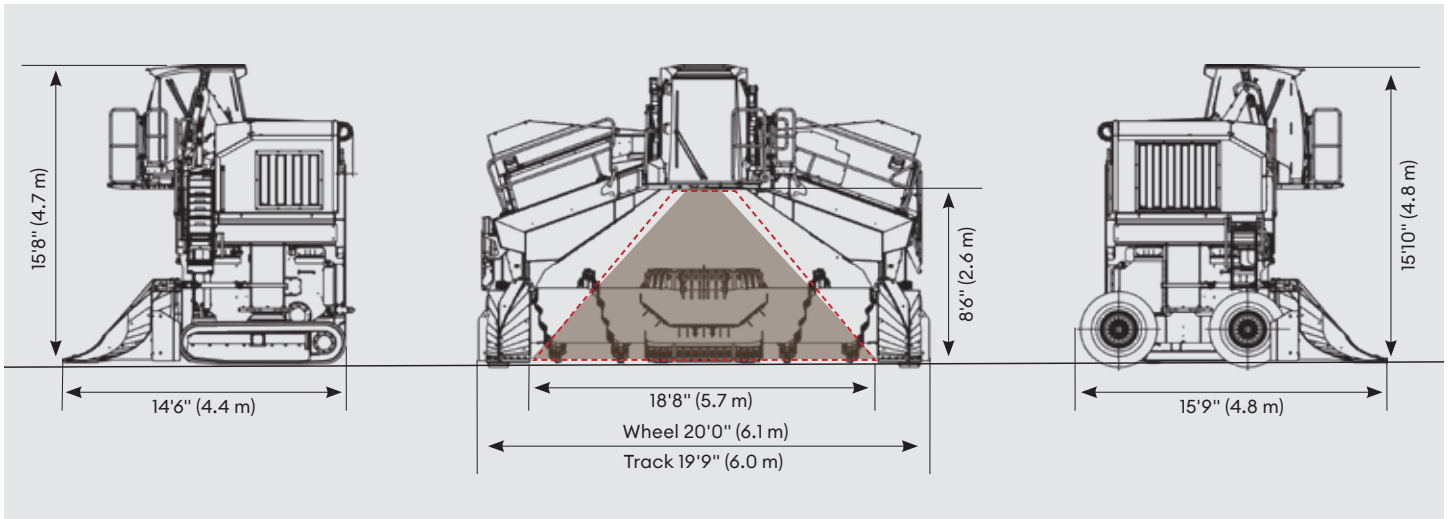

TOPTURN X63 Technical Specifications

Power

Diesel Engine / Horsepower: CAT® C13 Tier 4 Final/ 390 HP

Proportion (dependent on equipment)

Transport Dimensions:
 Wheel - 20'2" x 9'10" x 11'11" (6.1 x 2.9 x 3.6 m)
 Track - 20'2" x 8'4" x 11'10" (6.1 x 2.5 x 3.6 m)

Working Dimensions:
 Wheel - 20'0" x 15'9" x 15'10" (6.1 x 4.8 x 4.8 m)
 Track - 19'9" x 14'6" x 15'8" (6.0 x 4.4 x 4.7 m)

Weight: ~40,000 lbs (Wheel) / ~41,000 lbs (Track)

Performance (dependent on material)

Maximum Windrow Width: 18'8" (5.7 m)

Maximum Windrow Height: 8'6" (2.6 m)

Maximum Throughput: up to 5,800 yd³/hr (4,500 m³/hr)

Komptech Americas, LLC
 6345 Downing Street, Denver, CO 80216

[t] +1 720.890.9090
 [e] info@komptechamericas.com

We reserve the right to make technical changes due to ongoing development. USA2022-12

Scan this code to learn more about the TOPTURN X63 and watch it in action!

